



• HOLLAND PARK •

CLASSICAL

PARQUET

SPECIFICATION



Floors by
LEWIS ABBOTT
A member of Likewise®



Dovewing
1004



9 styles available in 2 different plank sizes,
suitable for both residential and light & heavy commercial use.


Application



Packaging

Type	Code	Size (mm)	Wear Layer	Packing	Carton
Classical	Wood	2.5 x 180 x 1200	0.55mm	18pcs/carton	3.89m ²
Parquet	Wood	2.5 x 76.2 x 228.6	0.55mm	216pcs/carton	3.763m ²

Structure

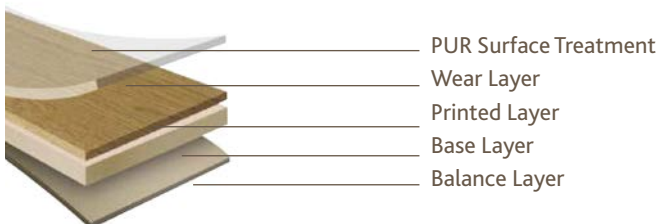

Benefits



Eco-friendly Product

- FloorScore® and DIBt certified for low VOCs.
- Phthalate Free (DEHP, DBP, BBP, DINP, DIDP, DNOP) & Heavy Metal Free (Cd, Pb, Hg, Cr6+).
- Made from safer, stronger raw materials.



Excellence in Design

- 18 options available in natural and modern color palette.
- High-resolution imaging and patterns for realistic wood and stone visuals.



Durable Technology

- PUR double coating improves resistance to scratches and stains.
- Quality assured by warranties.



CLASSICAL

PLANK SIZE 180 X 1200



English Oak
1001



Monument
1002



Shadow Oak
1003



Dovewing
1004



Arctic Oak
1005



City Oak
1006



Loft Oak
1007



Heritage Oak
1008



Smoked Oak
1009

PARQUET

PLANK SIZE 76.2 X 228.6



English Oak
2001



Monument
2002



Shadow Oak
2003



Dovewing
2004



Arctic Oak
2005



City Oak
2006



Loft Oak
2007



Heritage Oak
2008



Smoked Oak
2009



Technical Data

Characteristic	Standard	Overall Thickness Wear Layer	2.5mm 0.55mm
Type of Flooring	EN ISO 10582		PVC Heterogeneous
Surface Treatment			PUR
Size	EN ISO 24342	%	≤ 0.15
Straightness & Squareness	EN ISO 24342	mm	≤ 0.35
Classification	EN 685		Class 23/33/42
Overall Thickness	EN ISO 24346	mm	2.5
Wear Layer Thickness	EN ISO 24340	mm	0.55
Wear Resistance	EN 660-2		T
Residual indentation	EN ISO 24343-1	mm	≤ 0.1
Dimensional stability	EN ISO 23999	%	≤ 0.25
Curling	EN ISO 23999	mm	≤ 2
Color Fastness to Light	EN ISO 105-B02		≥ 6
Castor chair test	EN ISO 4918		No Change
Burning Characteristic	EN 13501-1		Bfl-s1
Chemical Resistance	EN ISO 26987		No Change
Slip resistance	EN 13893 DIN 51130		Class DS R9

Warranty

Guarantee against manufacturing defects and wear*	15 Years Commercial	20 Years Residential
---	---------------------	----------------------

* Warranty is valid only when installed in accordance with Lewis Abbott Installation & Maintenance guide.



WWW.FLOORSBYLEWISABBOTT.CO.UK/HOLLANDPARK

